
CGA COMPRESSED GAS SERVICE CYLINDER CONNECTIONS



CONNECTION NO. 320

PRESSURES UP TO 3000 PSI

Cylinder valve outlet Right hand Male



INLET CONNECTION RIGHT HAND FEMALE NUT, NIPPLE & GASKET

CONNECTION NO. 320

All dimensions are in inches - for reference only, subject to change.

							All dimensions are in inche	s - for reference only, subject to chang	
		CY	LINDE	R VALV	E OUTLET (CAPS			
PART NUMBER	DESCRIPTION				L				
CAP-30BR-P	BRASS W/ POLY DISC L	ESS RING &	CHAIN		0.54"	DUST CAPS		(
CAP-30BR-PR	BRASS W/ POLY DISC				0.54"		1" HEX	Ø1.25"	
CAP-30BR-TCR	BRASS W/ TEFLON CAL	CIUM FILLED	DISC		0.54"				
CAP-30CH-PR	NICKEL PLATED BRASS	W/ POLY DI	SC		0.54"			ALOI	
CAP-30SS-PR	303 STAINLESS STEEL	W/ POLY DIS	C		0.54"				
CAP-30SS-TCR	303 STAINLESS STEEL	W/ TEFLON (CALCIUM I	FILLED DIS	C 0.54"		3.75"		
				G/	ASKETS				
PART NUMBER	DESCRIPTION	D	Н	W					
GSK-32-T	VIRGIN PTFE	.703	.250	.094					
GSK-32-K	VIRGIN PCTFE	.703	.250	.094			ŢĦĨŢŢŢŢ		
IN	ILETS X 1/4" MA	LE NATI	ONAL	PIPE TH	IREAD (INCL	UDES NUT,	NIPPLE & PTFE GASKE	Г)	
PART NUMBER	DESCRIPTION			L	BRASS OR NIC	KEL PLATED	.94"		
INL-320BR-4M-48	BRASS			3.00"	BRASS NUT, N		φ.176"		
INL-CV320BR-4M	BRASS W/ CHECK VALV	'E		3.00"	GASKET				
INL-320CH-4M-48	NICKEL PLATED BRASS	1		3.00"					
INL-CV320CH-4M	NICKEL PLATED BRASS		AI VF	3.00"					
							[*		
INL-320SS-4M-28	STAINLESS STEEL			1.75"	STAINLESS ST		94" - 1 1/8	'HEX Ø.176" —	
INL-320SS-4M-40	STAINLESS STEEL			2.50"	303 NUT, 316L	NIPPLE &			
INL-320SS-4M-48 INL-320SS-4M-56	STAINLESS STEEL STAINLESS STEEL			3.00" 3.50"	GASKET				
INL-320SS-4M-58	STAINLESS STEEL STAINLESS STEEL W/ FILTER STAINLESS STEEL W/ CHECK VALVE			3.50 4.375"		PTIONAL INTEGRAL			
INL-CV320SS-4M				4.573 2.50"	Ū		L"		
		-			EC 202 CC MII	T 2161 CC	NIPPLE & PCTFE GASKE		
			JLAL (lə 303 33 NU	1, 310L 33	94"		
PART NUMBER	DESCRIPTION			L			-1 1/8	'ΗΕΧ Ø.180" —	
INL-320SS-4MFS-28	STAINLESS STEEL 12	Ra		- 1.75"					
INL-320SS-4MFS-P	STAINLESS STEEL 9 R			1.75"					
		e = Electropolishe							
Available with Check Valve upo							L" –		
INLETS X	ORBITAL TUBE V	VELD ST	UB (INC	CLUDES S	SILVER PLATE	ED 303 SS N	UT, 316L SS NIPPLE &	PCTFE GASKET)	
PART NUMBER	DESCRIPTION			L	т				
INL-320SS-4TS-28F	STAINLESS STEEL 12 R	a*		1.75"	1/4"0D X .035	" WALL	.94"	HEX	
INL-320SS-4TS-P	STAINLESS STEEL 9 Ra EP*			1.75"	1/4"0D X .035	" WALL			
INL-CV320SS-4TS	STAINLESS STEEL W/ CHECK VALVE			2.47"	1/4"0D X .035	" WALL			
INL-320SS-6TS-30F	STAINLESS STEEL 12 R	a		1.875"	3/8"0D X .035	" WALL			
INL-320SS-6TS-P	STAINLESS STEEL 9 Ra	EP		1.875"	3/8"0D X .035	" WALL	L" -		
INL-320SS-8TS-30F	STAINLESS STEEL 12 R	a		1.875"	1/2"0D X .049	" WALL			
INL-320SS-8TS-P	STAINLESS STEEL 9 Ra	EP		1.875"	1/2"0D X .049		I-7 Pigtail Handle available	EP = Electropolished ID	
			sed Gas				factured to CGA V-1 Standa	rds	
	Additional materi	als and confi	gurations	available o	n request. Minimu	um order quanti	ties may be required.		
	19 Industrial Road, Fa	irfield NLC		none: 072	-276-9011 Eav	· 973-276-00	114 www.gasflo.com		
				10110. 973	210-3011 14/	. 373-270-90	14 www.gash0.com	GASFLOPRODUC1	

MADE IN USA CGA320-2017

Member Compressed Gas Association








©GasFlo Products, Inc. 2017

PRESSURES UP TO 3000 PSI

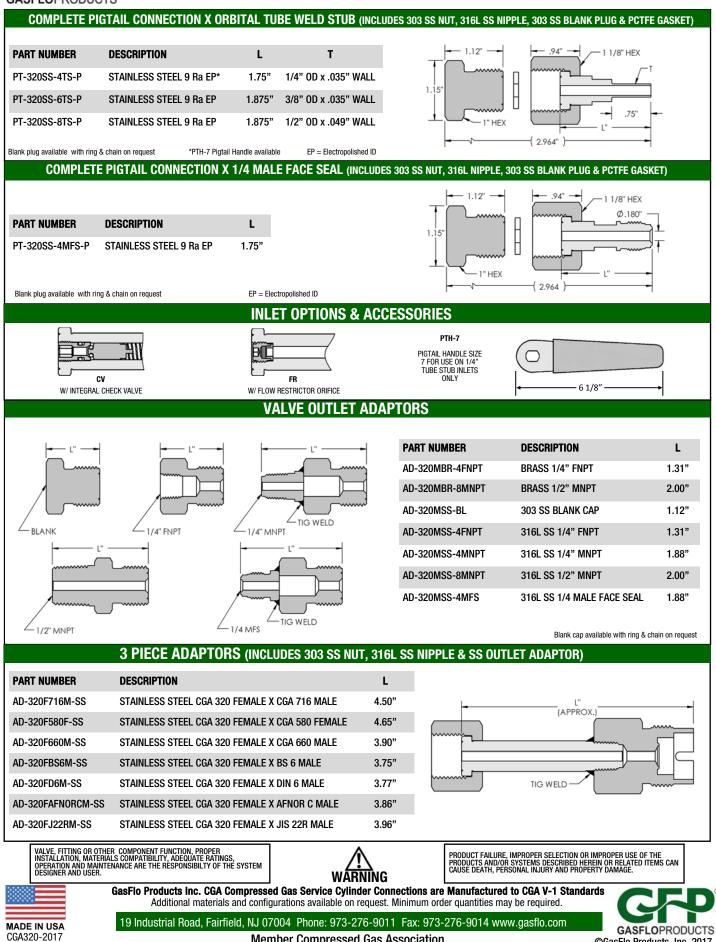

Member Compressed Gas Association