


PRESSURES UP TO 3000 PSI

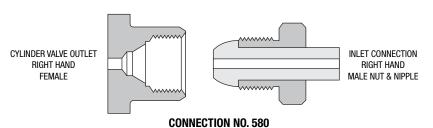

All dimensions are in inches - for reference only, subject to change.

CYLINDER VALVE OUTLET PLUGS					
PART NUMBER	DESCRIPTION	L	← L →		
PLU-580BR	BRASS W/ BUNA O-RING LESS RING & CHAIN	1.00"			
PLU-580BR-R	BRASS W/ BUNA O-RING	1.00"			
PLU-580CH-R	NICKEL PLATED BRASS W/ BUNA O-RING	1.00"	O-RING		
PLU-580SS-TR	303 STAINLESS STEEL W/ PTFE 0-RING	1.00"	C IIIII		
1					

INLETS X 1/4" MALE NATIONAL PIPE THREAD (INCLUDES NUT & NIPPLE)				
PART NUMBER	DESCRIPTION	L	BRASS OR NICKEL PLATED BRASS	1.125" → 1.1/8" HEX
INL-580BR-4M-56R	BRASS W/ FILTER	3.50"	NUT & NIPPLE	
INL-CV580BR-4M	BRASS W/ CHECK VALVE	3.50"		0.23
INL-580CH-4M-56R	NICKEL PLATED BRASS W/ FILTER	3.50"	PLATED SINTERED — BRONZE FILTER	
INL-CV580CH-4M	NICKEL PLATED BRASS W/ CHECK VALVE	3.50"	STANDARD	L
INI FOOCO AM AO	CTAINII FOO CTEFI	0.005"	OTAINI FOO OTEFI	
INL-580SS-4M-42	STAINLESS STEEL	2.625"	STAINLESS STEEL 303 NUT & 316L NIPPLE	1.125"—— 1 1/8" HEX
INL-580SS-4M-42V	STAINLESS STEEL W/ VITON O-RING	2.625"	303 NOT & STOL MILTEL	
INL-580SS-4M-56	STAINLESS STEEL	3.50"		0.176
INL-580SS-4M-56V	STAINLESS STEEL W/ VITON O-RING	3.00"		1
INL-580SS-4M-70R	STAINLESS STEEL W/ FILTER	4.375"		L
INL-CV580SS-4M	STAINLESS STEEL W/ CHECK VALVE	2.625"		

INLETS X 1/4 MALE FACE SEAL (INCLUDES 303 SS NUT & 316L SS NIPPLE)				
PART NUMBER	DESCRIPTION	L	-1.125"-1/8" HEX	
INL-580SS-4MFS-44	STAINLESS STEEL 12 Ra	2.75"		
INL-580SS-4MFS-44V	STAINLESS STEEL W/ VITON O-RING	G 12 Ra 2.75"	0.180"	
INL-580SS-4MFS-P	STAINLESS STEEL 9 Ra EP	2.75"		
Available with Check Valve	upon request EP	P = Electropolished ID	L	

INLETS X ORBITAL TUBE WELD STUB (INCLUDES SILVER PLATED 303 SS NUT & 316L SS NIPPLE)					
PART NUMBER	DESCRIPTION	L	T		
INL-580SS-4TS-42F	STAINLESS STEEL 12 Ra *	2.625"	1/4"0D x .035" WALL	1.125"—— 1.1/8" HEX	
INL-580SS-4TS-P	STAINLESS STEEL 9 Ra EP *	2.625"	1/4"0D x .035" WALL	T	
INL-CV580SS-4TS	STAINLESS STEEL W/ CHECK VALVE	2.625"	1/4"0D x .035" WALL	0.180"	
INL-580SS-6TS	STAINLESS STEEL 12 Ra	2.625"	3/8"0D x .035" WALL	0.75"	
INL-580SS-6TS-P	STAINLESS STEEL 9 Ra EP	2.625"	3/8"0D x .035" WALL	L	
INL-580SS-8TS	STAINLESS STEEL 12 Ra	2.625"	1/2"0D x .049" WALL	i I	
INL-580SS-8TS-P	STAINLESS STEEL 9 Ra EP	2.625"	1/2"0D x .049" WALL	*PTH-7 Pigtail Handle available EP = Electropolished II	



GasFlo Products Inc. CGA Compressed Gas Service Cylinder Connections are Manufactured to CGA V-1 Standards
Additional materials and configurations available on request. Minimum order quantities may be required.






PRESSURES UP TO 3000 PSI


COMPLETE PIGTAIL CONNECTION X ORBITAL TUBE WELD STUB (INCLUDES SILVER PLATED 303 SS NUT, 316L SS NIPPLE & 303 SS BLANK CAP)






COMPLETE PIGTAIL CONNECTION X 1/4 MALE FACE SEAL (INCLUDES 303 SS NUT, 316L SS NIPPLE & 303 SS BLANK CAP)







INLET OPTIONS & ACCESSORIES







W/ VITON O-RING










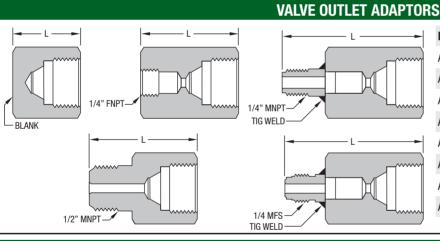

PART NUMBER	DESCRIPTION	L
AD-580FBR-4FNPT	BRASS 1/4" FNPT	2.00"
AD-580FBR-4MNPT	BRASS 1/4" MNPT	2.88"
AD-580FBR-8MNPT	BRASS 1/2" MNPT	2.12"
AD-580FSS-BL	303 SS BLANK CAP†	1.37"
AD-580FSS-4FNPT	316L SS 1/4" FNPT	2.00"
AD-580FSS-4MNPT	316L SS 1/4" MNPT	2.88"
AD-580FSS-8MNPT	316L SS 1/2" MNPT	2.12"
AD-580FSS-4MFS	316L SS 1/4 MALE FACE SEAL	2.83"
	†Blank cap available with ring & chain	on request

3 PIECE ADAPTORS (INCLUDES 303 SS NUT, 316L SS NIPPLE & SS OUTLET ADAPTOR)

PART NUMBER	DESCRIPTION	L
AD-580M718M-SS	STAINLESS STEEL CGA 580 MALE X CGA 718 MALE	4.00"
AD-580MBS3F-SS	STAINLESS STEEL CGA 580 MALE X BS 3 FEMALE	3.25"
AD-580MD6M-SS	STAINLESS STEEL CGA 580 MALE X DIN 6 MALE	3.25"
AD-580MD10M-SS	STAINLESS STEEL CGA 580 MALE X DIN 10 MALE	3.25"
AD-580MAFNORCM-SS	STAINLESS STEEL CGA 580 MALE X AFNOR C MALE	3.50"
AD-580MJ22RM-SS	STAINLESS STEEL CGA 580 MALE X JIS 22R MALE	3.50"



VALVE, FITTING OR OTHER COMPONENT FUNCTION, PROPER INSTALLATION, MATERIALS COMPATIBILITY, ADEQUATE RATINGS, OPERATION AND MAINTENANCE ARE THE RESPONSIBILITY OF THE SYSTEM DESIGNER AND USER.



PRODUCT FAILURE, IMPROPER SELECTION OR IMPROPER USE OF THE PRODUCTS AND/OR SYSTEMS DESCRIBED HEREIN OR RELATED ITEMS CAN CAUSE DEATH, PERSONAL INJURY AND PROPERTY DAMAGE.



GasFlo Products Inc. CGA Compressed Gas Service Cylinder Connections are Manufactured to CGA V-1 Standards

Additional materials and configurations available on request. Minimum order quantities may be required.

