



SPECIFICATIONS:

PRESSURE RATING: 3000 PSIG
 FLOW COEFFICIENT: $C_v = .26$
 SEAT ORIFICE SIZE: $\phi .125$
 TEMP. LIMITS: -65 TO 150°F
 MAX. ALLOW. LEAK: 2×10^{-8} ATM CC/SEC
 WETTED SURFACES: ALUMINUM, 316L SST, PCTFE

ITEM	PART NAME	MATERIAL	QTY
1	BODY	ALUMINUM 6061 T-6	1
2	SEAT INSERT	PCTFE (KEL-F)	1
3	DIAPHRAGM ASSY.	316L SST/COPPER	1
4	BONNET	303 SST	1
5	UPPER STEM	416 SST	1
6	HANDLE	ABS PLASTIC	1
7	WASHER	18-8 SST	1
8	SCREW	18-8 SST	1
9	LOWER STEM	316L SST	1
10	SPRING	316L SST	1
11	O-RING	VITON OR PCTFE AS PER CUSTOMER REQUEST	1
12	LABEL	VINYL/MYLAR	1

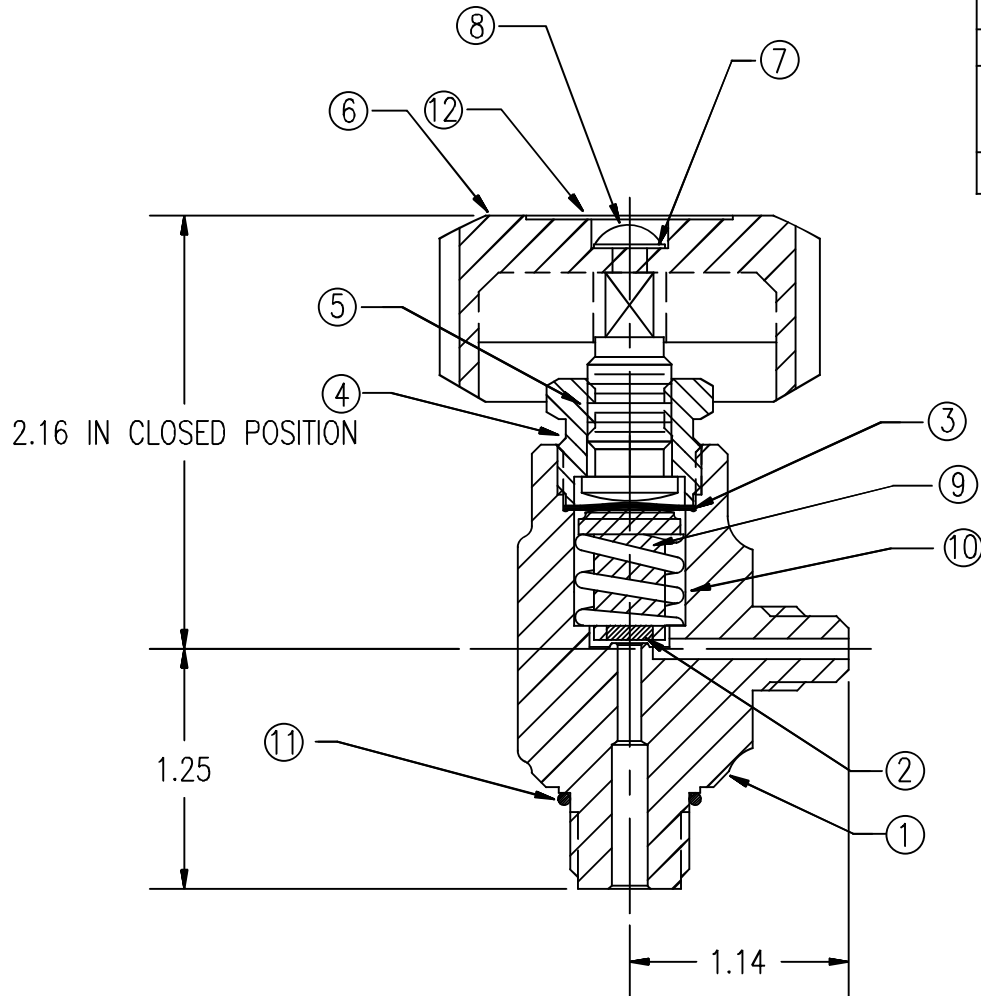

UNCONTROLLED
 FOR REFERENCE
 ONLY
 MB 1/5/2004

GasFlo Products Inc.
Fairfield, N.J.

SALES DRAWING- LECTURE BOTTLE VALVE
 5/8-18UNF x 165 OUTLET

THIS DOCUMENT CONTAINS INFORMATION THAT IS THE PROPRIETARY AND CONFIDENTIAL PROPERTY OF GASFLO PRODUCTS INC. AND MAY BE USED ONLY FOR AUTHORIZED PURPOSES. THIS DOCUMENT MAY NOT BE REPRODUCED WITHOUT GASFLO PRODUCTS INC. PRIOR WRITTEN CONSENT.

DWN MB	SCALE: 1:1
APPVD	DATE 1/5/04

DWG SALES-VLV-LB-10165AL-MM