



SPECIFICATIONS:

PRESSURE RATING: 3000 PSIG
 FLOW COEFFICIENT: $C_v = .26$
 SEAT ORIFICE SIZE: $\phi .125$
 TEMP. LIMITS: -65 TO 150°F
 MAX. ALLOW. LEAK: 2×10^{-8} ATM CC/SEC
 WETTED SURFACES: BRASS, 316L SST, PCTFE

ITEM	PART NAME	MATERIAL	QTY
1	BODY	BRASS CDA-377	1
2	SEAT INSERT	PCTFE (KEL-F)	1
3	DIAPHRAGM ASSY.	316L SST/COPPER	1
4	BONNET	303 SST	1
5	UPPER STEM	416 SST	1
6	HANDLE	ABS PLASTIC	1
7	WASHER	18-8 SST	1
8	SCREW	18-8 SST	1
9	LOWER STEM	BRASS CDA-360	1
10	SPRING	316L SST	1
11	LABEL	VINYL/MYLAR	1

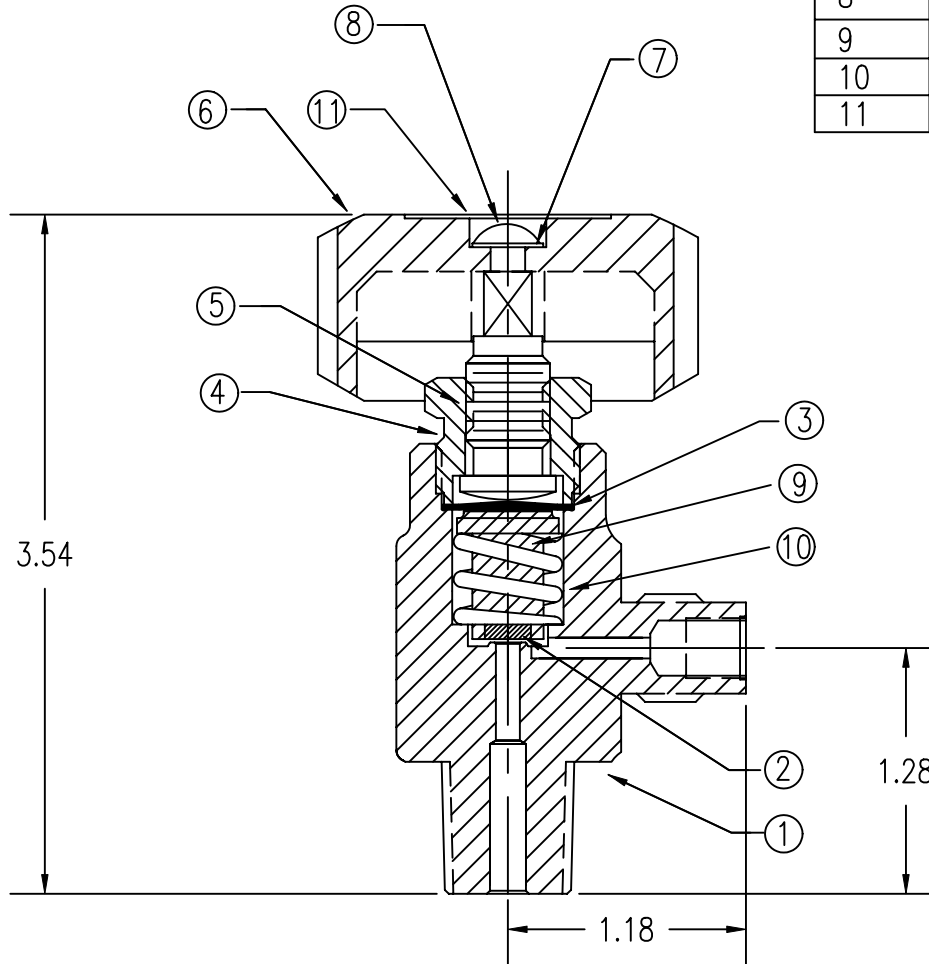

UNCONTROLLED
 For Reference Only
 MB 3/30/2007

GasFlo Products Inc.
Fairfield, N.J.

SALES DRAWING- LECTURE BOTTLE VALVE
 3/8-18NGT x 170/110 OUTLET