


- NOTES:  
1. DIMENSIONS ARE IN INCHES [mm].  
2. WELD BEAD TO COVER ALL EXPOSED THREADS AT JOINTS.  
3. BODY, ADAPTORS, AND TUBE EXTENSIONS ARE ELECTROPOLISHED AFTER WELDING.  
4. CLEANED AND PACKAGED FOR OXYGEN SERVICE.

| ITEM | PART NAME        | MATERIAL      | QTY |
|------|------------------|---------------|-----|
| 1    | UPPER STEM       | MONEL R405    | 1   |
| 2    | PACKING RING     | VIRGIN TEFLON | 1   |
| 3    | HANDLE NUT       | ASB           | 1   |
| 4    | HANDLE           | BRASS         | 1   |
| 5    | BONNET           | ASB           | 1   |
| 6    | THRUST BEARING   | VIRGIN TEFLON | 1   |
| 7    | PACKING FOLLOWER | ASB           | 1   |
| 8    | PACKING NUT      | ASB           | 1   |
| 9    | DISC SPRING      | PH SST        | 3   |
| 10   | SPRING           | 316 SST       | 1   |
| 11   | LOWER STEM ASSY. | MONEL/KEL-F   | 1   |
| 12   | BODY             | 316L SST      | 1   |
| 13   | RING             | BRASS         | 1   |
| 14   | PACKING          | TEFLON        | 1   |
| 15   | ADAPTOR          | 316L SST      | 2   |
| 16   | TUBE EXTENSION   | 316L SST      | 2   |

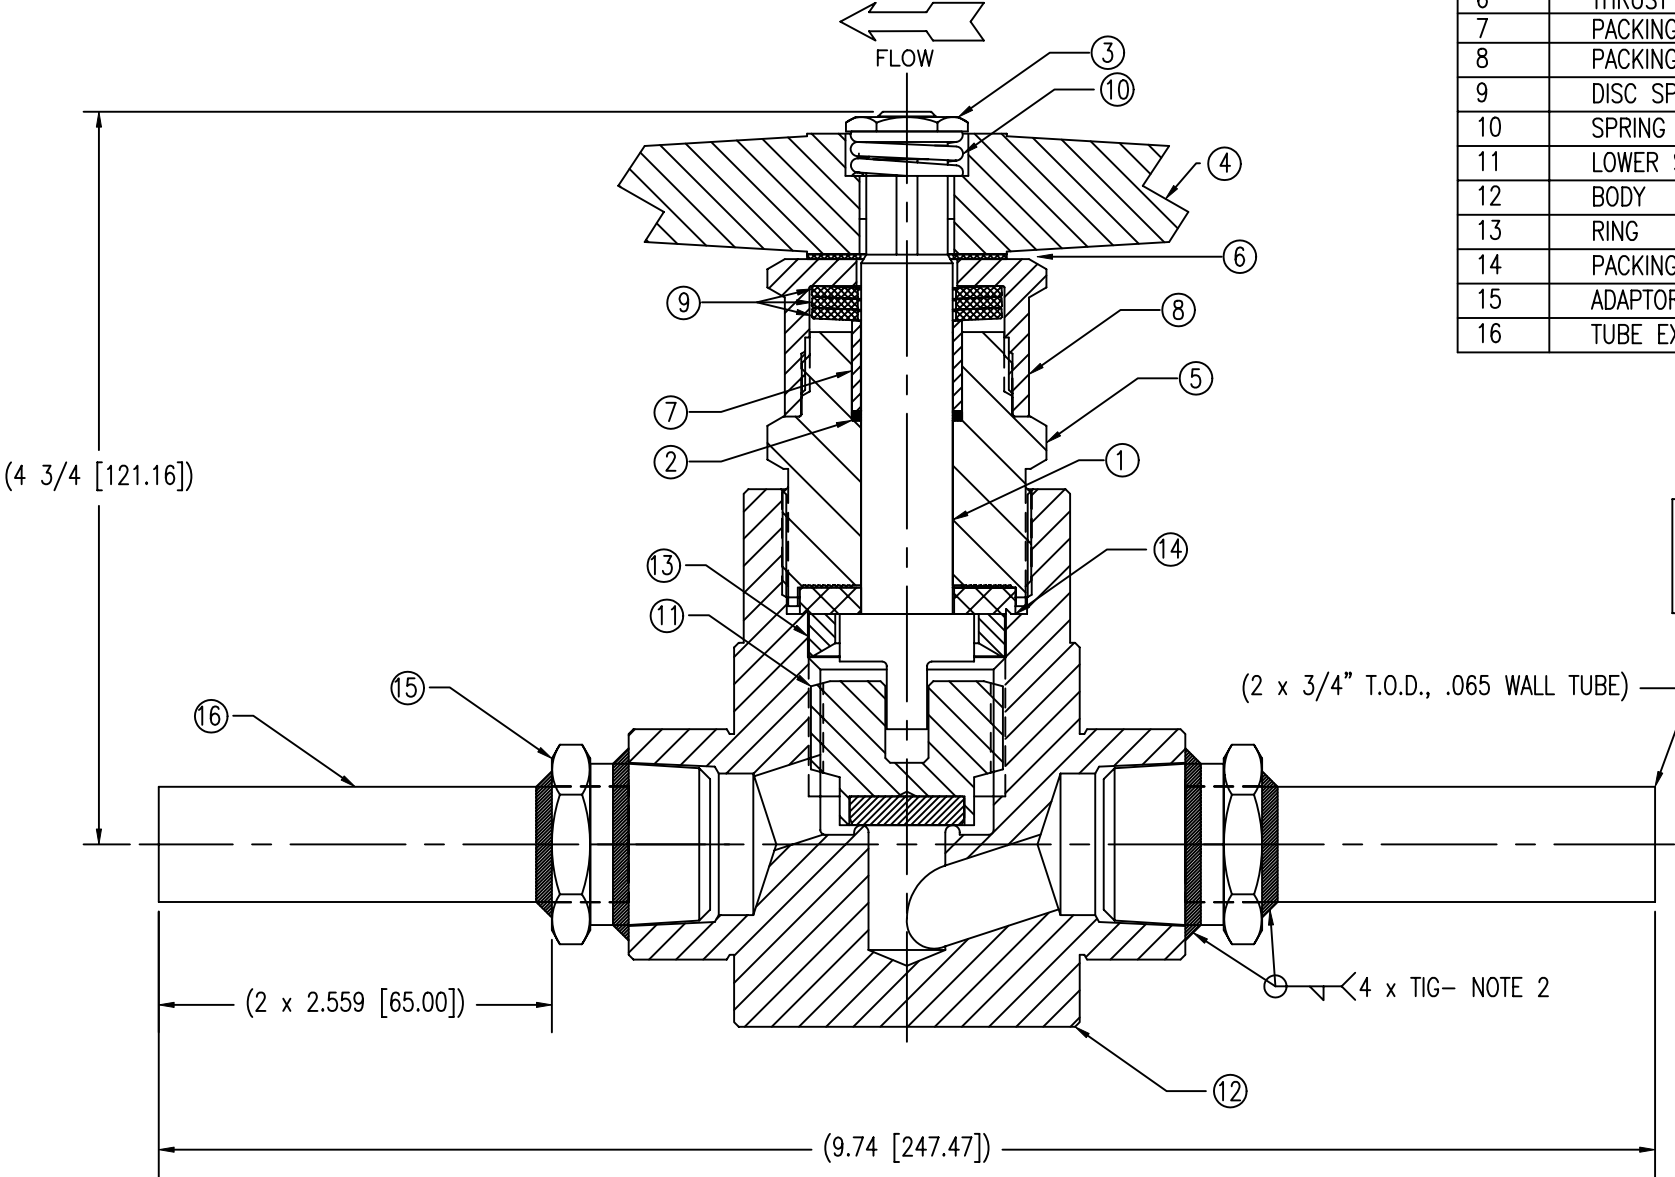

UNCONTROLLED  
For Reference Only  
MB 6/6/2012

SPECIFICATIONS:  
PRESSURE RATING: 3500 PSI  
FLOW COEFFICIENT  $C_v = 3.5$   
SEAT ORIFICE SIZE: .50  $\phi$   
SEAT MATERIAL: KEL-F  
TEMPERATURE LIMITS: -65° F TO 150° F  
LEAK RATE: 1x10-3 ATM CC/SEC N2

GasFlo Products Inc.  
Fairfield, N.J.

SALES DWG.- 3/4 TUBE STUB x 3/4 TUBE STUB-  
WELDED & ELECTROPOLISHED PRESSURE SEAL VALVE

THIS DOCUMENT CONTAINS INFORMATION THAT IS THE PROPRIETARY AND CONFIDENTIAL PROPERTY OF GASFLO PRODUCTS INC. AND MAY BE USED ONLY FOR AUTHORIZED PURPOSES.  
THIS DOCUMENT MAY NOT BE REPRODUCED WITHOUT GASFLO PRODUCTS INC. PRIOR WRITTEN CONSENT

DWN: MB  
APPVD:

SCALE: NTS  
DATE: 6/6/12

DWG: SALES-VLV-PS-1212SS-TSTS-0