

PRESSURE RATING: 3000 PSIG
TEMP. LIMITS: -65 TO 150°F
MAX. ALLOW. LEAK: 2 x 10⁻⁸ ATM CC/SEC
WETTED SURFACES: BRASS, 316L SST, PCTFE

ITEM	PART NAME	MATERIAL	QTY
1	BODY	BRASS CDA-377	1
2	SEAT INSERT	PCTFE	1
3	DIAPHRAGM ASSY.	316L SST/COPPER	1
4	BONNET	BRASS CDA-360	1
5	UPPER STEM	416 SST	1
6	HANDLE	ABS PLASTIC	1
7	WASHER	18-8 SST	1
8	SCREW	18-8 SST	1
9	LOWER STEM	316L SST	1
10	SPRING	316L SST	1
11	LABEL	VINYL/MYLAR	1

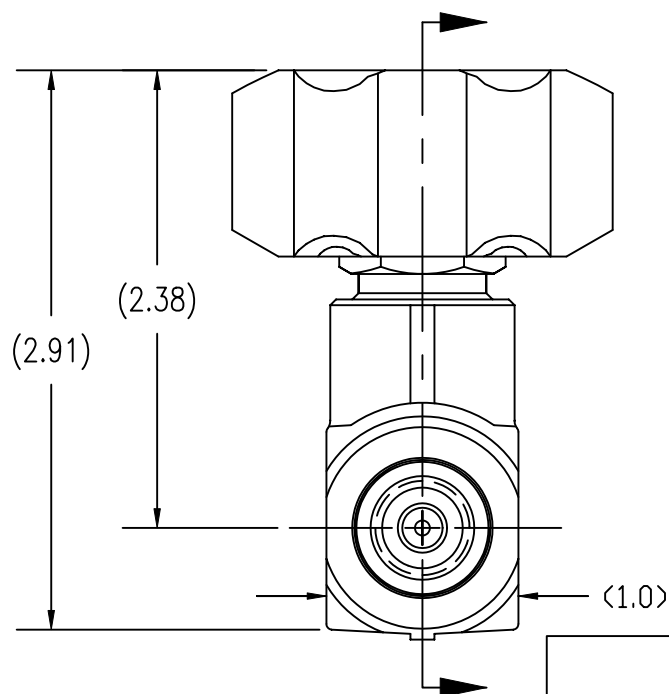
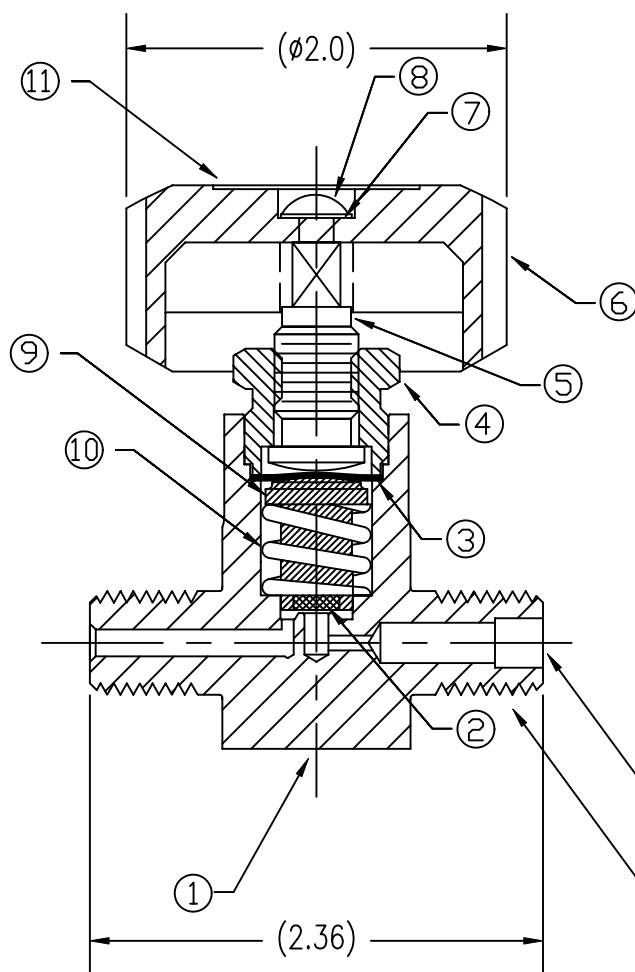


Diagram of a converging duct. The flow direction is indicated by an arrow pointing left, labeled "FLOW".

UNCONTROLLED
For Reference Only

MB 3/30/2007

GasFlo Products Inc.
Fairfield, N.J.

SALES DWG.— SPRING TYPE DIAPHRAGM VALVE
BRASS— 1/4 MNPT x 1/4 MNPT
W/ DIP TUBE PORT

THIS DOCUMENT CONTAINS INFORMATION THAT IS THE PROPRIETARY AND CONFIDENTIAL PROPERTY OF GASFLO PRODUCTS INC. AND MAY BE USED ONLY FOR AUTHORIZED PURPOSES. THIS DOCUMENT MAY NOT BE REPRODUCED WITHOUT GASFLO PRODUCTS INC. PRIOR WRITTEN CONSENT.

DWN	MB
APPVD	

SCALE:	NTS
DATE	12/9/

DWG

SALES-VLV-ST-44BR-MM-MC