
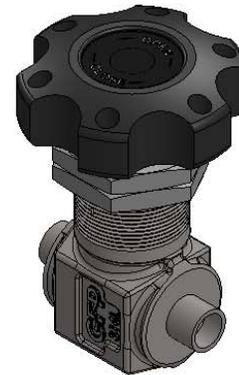


ITEM	PART NUMBER	DESCRIPTION	QTY.
1	PANEL MOUNT NUT	303 SST	2
2	BODY	316L SST	1
3	SEAT	PCTFE	1
4	SPRING SEAT	316L SST	1
5	SPRING	316L SST	1
6	SPRING RETAINER	316L SST	1
7	LOWER STEM	316L SST	1
8	DIAPHRAGM	ELGILOY	4
9	BUTTON ASSY.	316L SST/PFRP	1
10	BONNET	316L SST	1
11	BONNET NUT	303 SST	1
12	UPPER STEM	416 SST	1
13	HANDLE	ALUMINUM	1
14	SCREW	18-8 SST	1
15	LABEL	VINYL/MYLAR	1
16	LOCKWASHER	SST	1

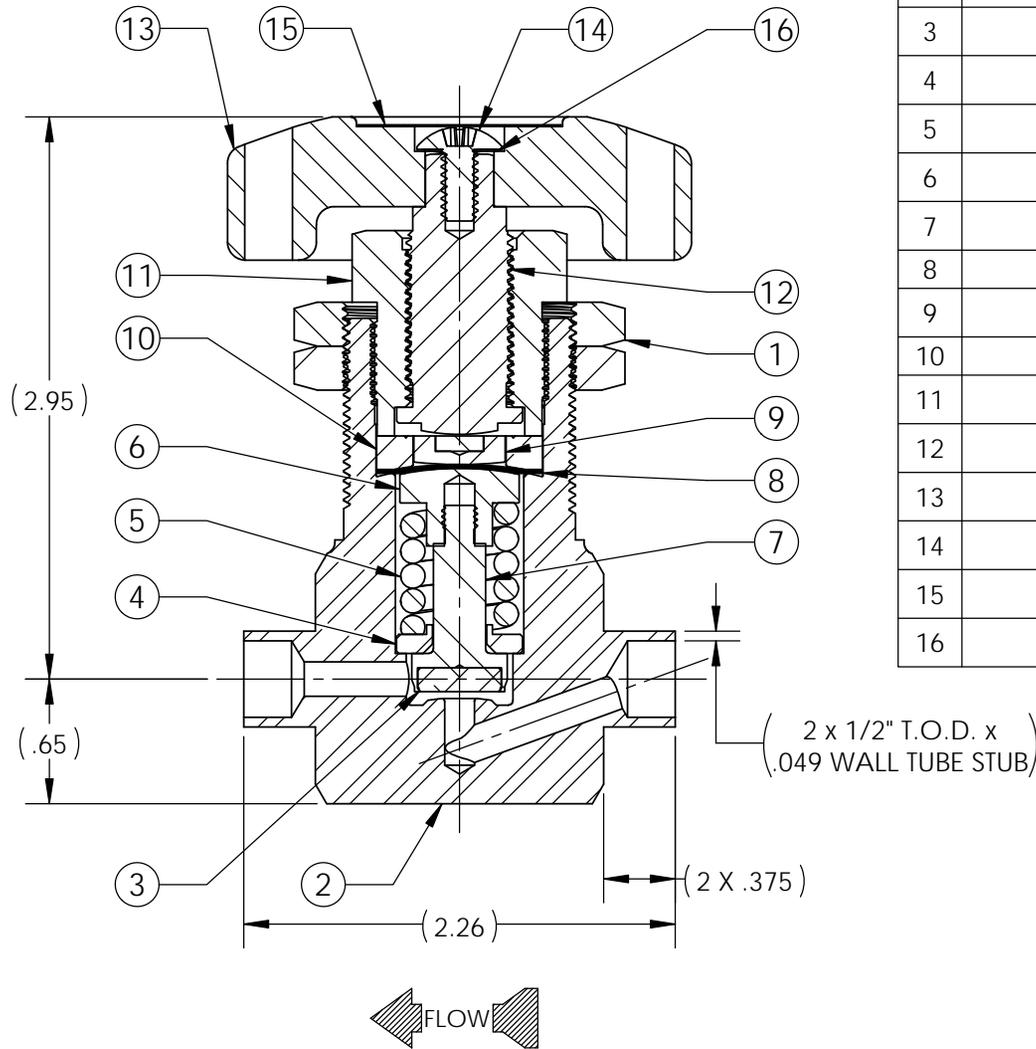

SCALE 1 : 2

SPECIFICATIONS:
 PRESSURE RATING: 0 PSIA TO 3500 PSIG @ 70°
 FLOW COEFFICIENT: $C_v = .30$
 SEAT ORIFICE SIZE: $\phi .156$
 LEAK RATE: 2×10^{-8} CC/SEC-ATM He
 BONNET NUT ASSEMBLY TORQUE: 92 FT. LBS.
 GASFLO REPAIR KIT: RK-ST8-SS-K

SALES DRAWING
UNCONTROLLED
FOR
REFERENCE
ONLY

NOTES:
 1. DIMENSIONS ARE IN INCHES.

REV	CURRENT REVISION	DATE
A	ESTABLISH GFP DRAWING FOR THIS ITEM	11/11/2015

DESCRIPTION: VALVE ST DIA-PL 1/2 TS X 1/2 TS SS		
PART NUMBER: VLV-ST-88SS-TSTS		
SIZE: A	SCALE: NTS	MAT'L: SEE B.O.M.
SHEET NUMBER: 1 OF 1		DRAWN BY: aparadiseasher on 11/11/2015



THIS DOCUMENT CONTAINS INFORMATION THAT IS THE PROPRIETARY AND CONFIDENTIAL PROPERTY OF GASFLO PRODUCTS INC. AND MAY BE USED ONLY FOR AUTHORIZED PURPOSES. THIS DOCUMENT MAY NOT BE REPRODUCED WITHOUT GASFLO PRODUCTS INC. PRIOR WRITTEN CONSENT.

APPR: mbojcik on 03/30/2017